

MODEL NUMBER:

SINGER MODEL SCP-TP
SINGLE PROCESS MULTI-APPLICATION CONTROLLER
IOM: A-9124AX

SCP - TP - ____ - ____

SELECTION AND CONFIGURATION

SCP-TP- XX- XXXX

FRONT DOOR

CD - CLEAR DOOR
OD - OPAQUE DOOR

SUPPLY VOLTAGE

120AC -120VAC, 60 Hz
240AC - 240VAC, 50 Hz
24DC - 24VDC



APPLICATION:

- ☐ 1 MODULATING PROCESS CONTROL
☐ 2 ON/OFF CONTROL
☐ 3 MOTORIZED PILOT ACTUATOR CONTROL

PROCESS:

- ☐ 1 VALVE POSITION ☐ 4 DOWNSTREAM PRESSURE
☐ 2 FLOW ☐ 5 UPSTREAM PRESSURE
☐ 3 LEVEL

☐ TRANSMITTER RANGE: _____

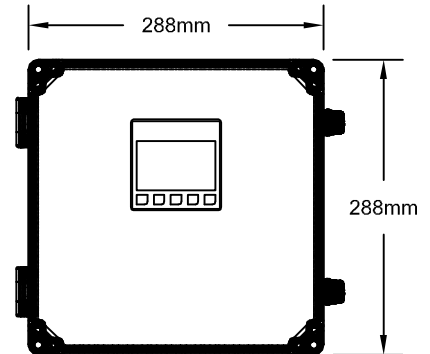

TOUCHSCREEN INSTALLED
ON AN INTERNAL DOOR

ENCLOSURE STANDARD SPECIFICATION:

MATERIAL: POLYCARBONATE
ENVIRONMENTAL RATING: NEMA TYPE 4, 4X, 12, 13
IEC 60529, IP66, IP67
DIMENSIONS: 11.34"(288mm) x 11.34"(288mm) x 6.81" (173mm)

ALARM/RELAY OUTPUT: (SELECT TWO FUNCTIONS)

- ☐ 1 SENSOR BREAK ☐ 5 MODBUS TOGGLE
☐ 2 MANUAL MODE ☐ 6 STRAINER FLUSH
☐ 3 REMOTE SP SELECT
☐ 4 POSITIONING ALARM

MODBUS COMMUNICATION:

- ☐ 1 ENABLE ☐ A. SERIAL ☐ B. ETHERNET

ADDITIONAL NOTES: